

## TECHNICAL FEATURES

### Wide IP55 housing

**E**SERIES

#### Application

Garages, cellars, balconies, terraces, porticoes, the outer perimeter of buildings, gardens, public toilets, changing rooms, industrial kitchens, workshops, etc.

#### Compliance

EN60529:1997/A2:2014 - EM60670-1:2005 + A1:2013

#### IP55 housing for 3-module flush mount box

Housing with hinged door with IP55 protection rating even when plugged in and door closed.

#### Outlet compatibility


Vimar®, Plana™.

#### Main features of Wide IP55 enclosures

- Protection rating IP55.
- Two-module rocker mount.
- The IP55 rating refers to the output of a single cable of  $\varnothing$  10mm max.
- Made of flame-retardant ABS/PC/TPE.
- 2 screws supplied for fixing to the box (3x20mm).

#### Plug compatibility


- Use standard S10/11 S16/17 plugs (maximum plug length 55.2 mm excluding contacts, cable diameter 5-10 mm).
- Use standard S30/S31 plugs with axial cable (max. plug length 53 mm excluding contacts), or with 90° cable (max. plug length 69.5 mm).

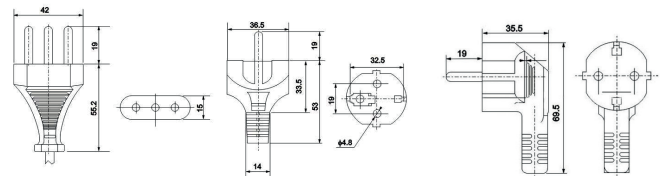

#### Codes and dimensions

Type	Colour	Code	A	B	C	D	E
With outlet	RAL 7035	4B.W.RAL.015	126.30	90.65	68.20	38.90	29.30
	anthracite	4B.W.03.015	126.30	90.65	68.20	38.90	29.30
	white	4B.W.01.015	126.30	90.65	68.20	38.90	29.30
	forest green	4B.W.04.015	126.30	90.65	68.20	38.90	29.30
Without outlet	RAL 7035	4B.W.RAL	126.30	90.65	64.78	35.48	29.30
	anthracite	4B.W.03	126.30	90.65	64.78	35.48	29.30
	white	4B.W.01	126.30	90.65	64.78	35.48	29.30
	forest green	4B.W.04	126.30	90.65	64.78	35.48	29.30

Measurements in mm

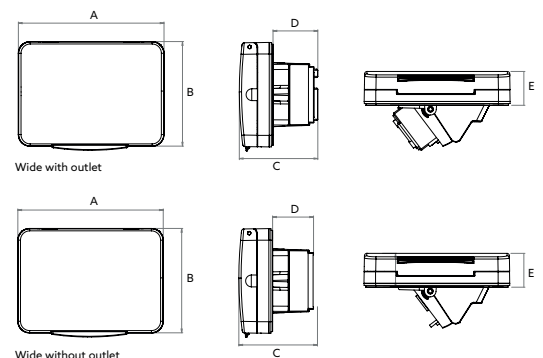

#### Compatibility with 3-module boxes

Flush mount boxes for masonry walls				Flush mount boxes for partition walls			
Biticino 503E	Gewiss GW24403	Vimar V71303	Ave 250MG 253x4	Biticino PB503	Gewiss GW24207 GW24403PM	Vimar V71703	Ave 253CG
yes	yes	yes	yes	no	no	no	no

**CE** Made in P.R.C.

**4box.it**