

TECHNICAL FEATURES

Multistandard sockets 250 V AC

PSERIES

Application

Power supply for household appliances, mobile luminaires, etc.

Side XL compliance

Multistandard product: test reports issued by IMQ in accordance with CEI 23-50:2007 (IEC 60884-1) +V1:2008 + V2:2011 as applicable.

Main features of Side XL

- Rated voltage: 250 V AC
- Rated current: 10 A - 16 A
- Shielded active contacts
- Disconnection power: 50 cycles (plug connection and disconnection) 275 V AC $\cos \phi$ 0.6 (12.5 A and 20 A)
- Electrical life: > 5,000 cycles (plug connection and disconnection) with current and voltage ratings at $\cos \phi$ 0.8
- Differentiated elastic contacts


Compatible with

Bticino®, Vimar®.

Compatibility, codes and dimensions

Brand	Model	Colour	Code	A	B	C
Vimar®	Plana™	white	4B.V14.H21.XL	67.30	48.46	40.20
Bticino®	Matix™	white	4B.AM.H21.XL	70.56	49.00	40.20
	LivingLight™	white	4B.N. H21.XL	65.70	47.00	40.20
		tech	4B.NT.H21.XL	65.70	47.00	40.20
		anthracite	4B.L.H21.XL	65.70	47.00	40.20

Measurements in mm

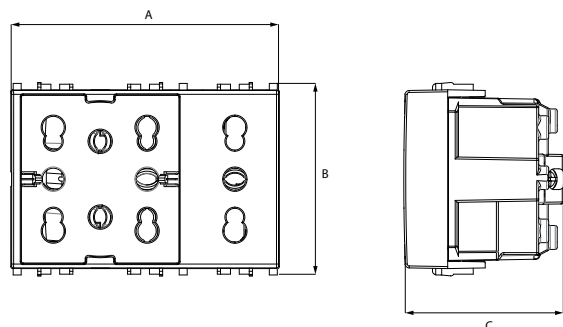

Plugs suitable for use with Side XL

Italian standard



2P 10 A




2P+T 10 A




2P+T 16 A

German standard



2P+T

Plug sockets, possible couplings

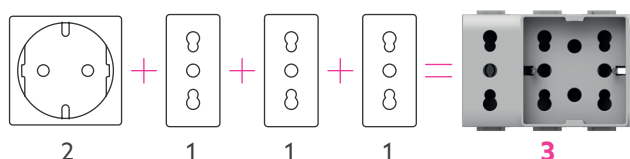

Multistandard sockets 250 V AC

2P+E 16 A socket, multistandard, for:
Europlugs 2P 2.5 A,
Italian standards 2P and 2P+E 10 A and 16 A plugs,
German standard 2P+E 16 A 250 V plugs (two modules)
Does not create earth continuity with the standard French plug