

S Series product features


4b P40 S



Function **controlled socket**

Smart electrical socket that can be controlled remotely or locally via an auxiliary input.

Connection diagram:

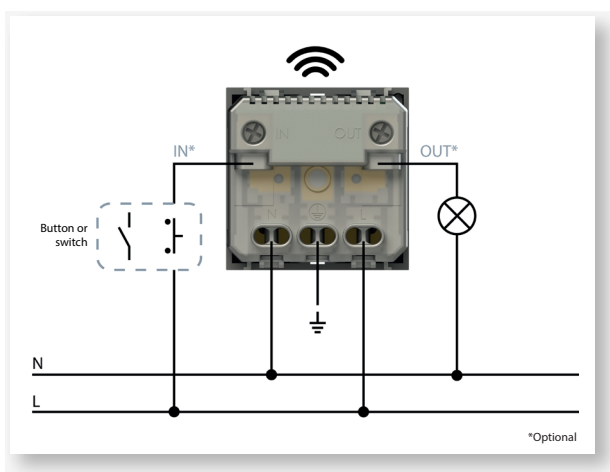

Note: The auxiliary output can be used to control other non-smart sockets.

S Series product features

4b Uniko Lite S




Function **single command**

Control for managing a single light point. It can be connected via terminals I1 and I2 to other auxiliary push-buttons/switches.

Command set as NO or NC push-button.

See the wiring diagram for more details.

Connection diagram:

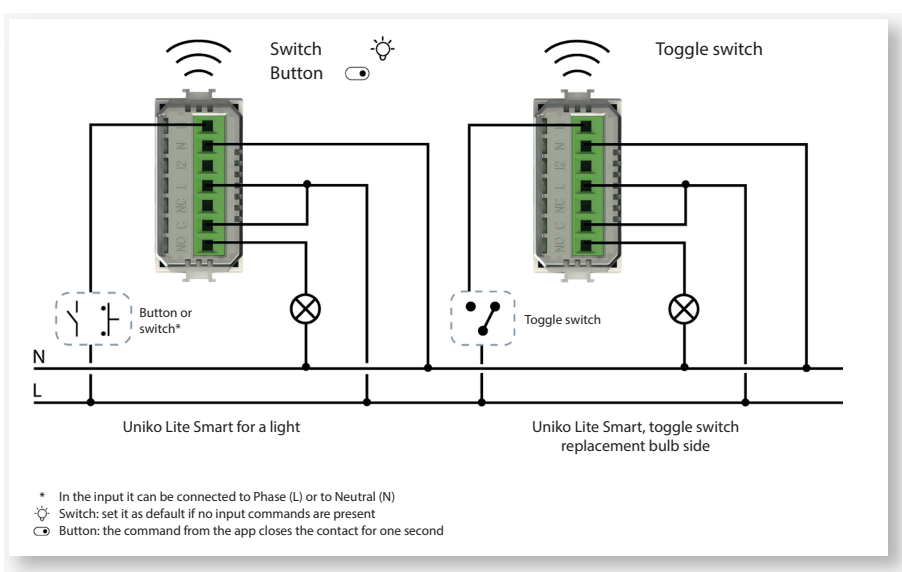

Note: If a push-button is used, the pulse must be <1 sec.



FAQ

S Series product features

4b Uniko Pro S



Function **single command**

Manage controls for a single light point.
It can be connected via terminals I1 and I2 to other auxiliary push-buttons/switches.

Operate the Smart command as a toggle switch.

Manage the Smart control as an intermediate switch. (min 3w)

Manage the control as an NO push-button.
See the wiring diagram for more details.

Function **dual command**

Control of two lighting points via special power outputs O1 and O2. It can be connected via terminals I1 and I2 to other auxiliary push-buttons/switches.

Double push-button management: both push-buttons will be configured as NO push-buttons.
See the wiring diagram for more details.

Function **roller shutter motor**

Control for operating the motor of a classic roller shutter or electric blind.


Control for operating the motor of a sunshade/roller shutter, with the possibility of adjusting the inclination of the sunshade when the limit switch is reached.

Control for operating the motor of an outdoor awning (reverse operation).
See the wiring diagram for more details.

Note: Configure the shutter template before testing operation.

S Series product features

Connection diagram:

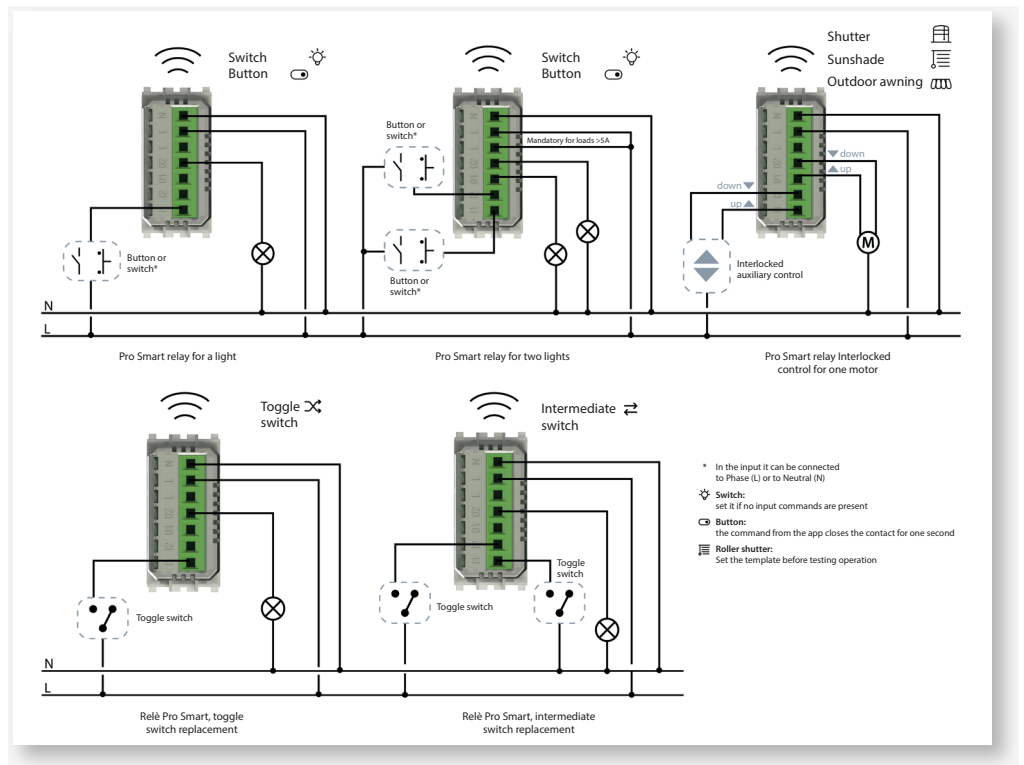

Note: when set as a single command, the only output available is O2.
If a push-button is used, the pulse must be <1 sec.