

TECHNICAL FEATURES

Multistandard 250 V AC current sockets

PSERIES

Application

Power supply for household appliances, mobile luminaires, etc.

P40 compliance

Multistandard product
IMQ test report in accordance with standard CEI 23-50/2007 + V1/2008 + V2/2011 + V3/2015 + V4/2015.

Plugs compatible with P40

Italian standard



2P 10 A




2P+T 10 A



2P+T 16

German standard



2P+T

Main features of the P40 socket

Rated voltage: 250 V AC
Rated current: 10 A - 16 A
Shielded active contacts
Disconnection power: 50 cycles (plug connection and disconnection) 275 V AC $\cos \phi$ 0.6 (12.5 A and 20 A)
Electrical life: > 5,000 cycles (plug connection and disconnection) with current and voltage ratings at $\cos \phi$ 0.8
Differentiated elastic contacts.


Compatible with

Bticino®, Vimar®, Gewiss®.

Compatibility, codes and dimensions

Brand	Model	Colour	Code	A	B	C
Vimar®	Plana™	white	4B.V14.P40	44.00	48.45	39.70
		red	4B.V14R.P40	44.00	48.45	39.70
	Arkè™	white	4B.V19M.P40	44.80	48.45	39.71
		grey	4B.V19M.P40	44.80	48.45	39.71
		metal	4B.V19M.P40	44.80	48.45	39.71
		red	4B.V19R.P40	44.80	48.45	39.71
Bticino®	Matix™	white	4B.AM.P40	47.00	49.00	39.91
		red	4B.AM.P40	47.00	49.00	39.91
	LivingLight™	white	4B.N.P40	44.25	47.00	39.71
		tech	4B.NT.P40	44.25	47.00	39.71
		anthracite	4B.L.P40	44.25	47.00	39.71
		red	4B.LR.P40	44.25	47.00	39.71
Gewiss®	System™	white	4B.G20.P40	46.60	45.60	39.91
		red	4B.G20R.P40	46.60	45.60	39.91

Measurements in mm

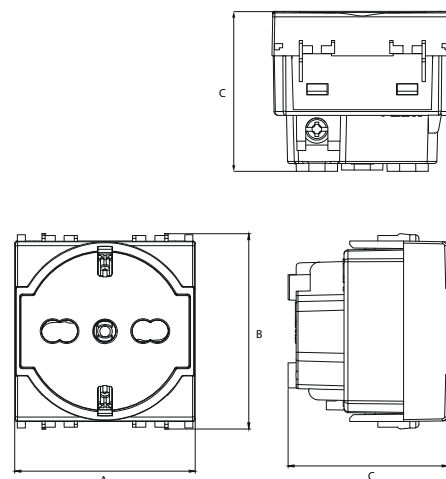

Multistandard sockets 250 V AC

2P+E 16 A socket, multistandard, for:
Europlugs 2P 2.5 A,
Italian standards 2P and 2P+E 10 A and 16 A plugs,
Plugs 2P+E 16 A 250 V German standard (two modules)
Does not create earth continuity with the standard French plug



Made in P.R.C.

4box.it