



## TECHNICAL FEATURES


### SMART control 1 relay

## S SERIES

Uniko Lite SMART is a single push-button connected with a WiFi/BLE module, with a single on-board relay operating in the 110-230 V range up to a maximum of 7A; Uniko Lite is 'Smart', i.e. it can be controlled remotely via a smartphone App.

### Field of application

Uniko Lite SMART can be programmed to have the Single push-button function

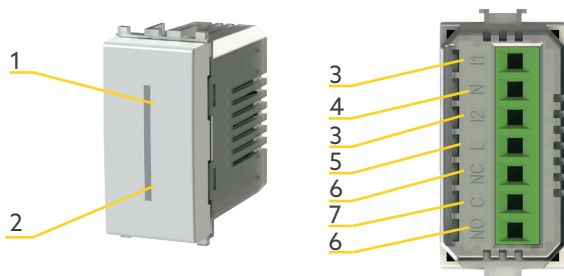

1. On/Off push-button
2. On/Off push-button
3. Terminals I1 and I2 for optional push-button inputs
4. Neutral N terminal
5. Terminals L phase in
6. NC and NO terminals for connecting normally open or normally closed contacts at the output
7. Terminal C load connection

### Compliance

4 BOX declares under its own responsibility that the Uniko Lite Smart device complies with the following directives and that this compliance has been assessed in accordance with the respective applicable standards:

- Directive 2014/53/EU (Effective use of radio spectrum to avoid harmful interference)
- Reference standard: ETSI EN 300 328 V2.2.2
- Directive 2014/35/EU (Protection of the health and safety of users).
- Reference standard: EN 62368-1:2014+A11:2017
- Directive 2014/30/EU (electromagnetic compatibility protection requirements)
- Reference Standards: CEI EN 55032:2015, EN 55035:2017+A11:2020 and ETSI EN 301 489-1/17.
- Directive 2013/35/EU (protection requirements with regard to physical agents).
- Reference standard: CEI EN IEC 62311:2021
- RoHS Directive.

### Main features of Uniko Lite SMART

- Recessed mounting
- Material: thermoplastic.
- RGB lighting.
- Protection rating: IP40.
- Screw clamps.

	7 x 2.5 mm <sup>2</sup>
	+5 °C +45 °C
Operating voltage	110V - 230V /50-60Hz
Maximum current	7A
Maximum power	1610 W
Technology	WiFi/BLE radio
Operating frequency	2.4 GHz
Standby consumption	1 Wh



4b Uniko Lite S



## TECHNICAL FEATURES

### SMART control 1 relay

**SERIES S**




### Compatibility, codes and dimensions

Brand	Model	Colour	Code	A	B	C
Vimar®	Plana™	white	4BCU1S.V14	48.00	22.08	43.41
	Arkè™	white	4BCU1S.V19B	48.00	22.08	43.41
		grey	4BCU1S.V19	48.00	22.08	43.41
		metal	4BCU1S.V19M	48.00	22.08	43.41
Bticino®	Matix™	white	4BCU1S.AM	48.50	23.03	43.40
	LivingLight™	white	4BCU1S.N	47.00	21.80	43.50
		tech	4BCU1S.NT	47.00	21.80	43.50
		anthracite	4BCU1S.L	47.00	21.80	43.50
	LivingNow™	without cover	4BCU1S.K	46.60	22.00	39.40

Measurements in mm

### Coupling compatibility

Bticino®, Vimar®.

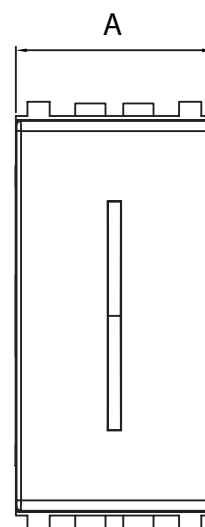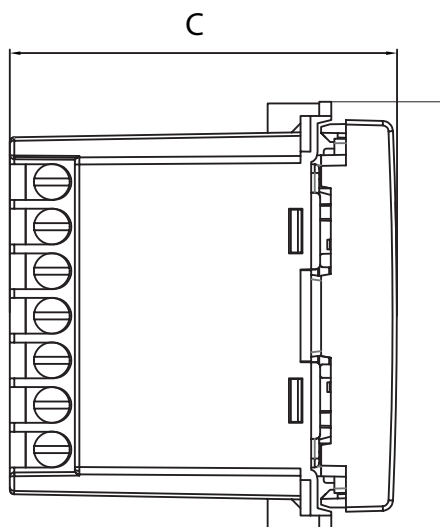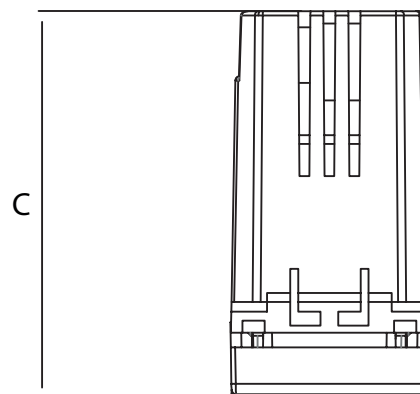

Made in P.R.C.

**4box.it**

**4 BOX s.r.l.**

VAT IT07624080961

info@4box.it

phone +39 02 655 603 73

Registered office and operational headquarters

Via Filippo Brunelleschi, 16, 20166 Milan

Tax ID and Business Register No.:

07624080961 - Economic and Administrative Index (R.E.A.) 1972154  
Chamber of Commerce (C.C.I.A.A.) MI - Share Cap. € 20,000