



4b P40



TECHNICAL SPECIFICATIONS

Electrical sockets 250 V AC

PSERIES

Applications

Electrical outlets for general residential and commercial use.

Compatibility, codes and dimensions

Brand	System	Colour	Code	A	B	C
Vimar®	Plana™	white	4B.V14.P40	44.80	48.45	39.71
		red	4B.V14R.P40	44.80	48.45	39.71
	Arkè™	white	4B.V19M.P40	44.80	48.45	39.71
		grey	4B.V19M.P40	44.80	48.45	39.71
		metal	4B.V19M.P40	44.80	48.45	39.71
	Linea™	white	4BPP40.V30B	44.70	52.61	39.71
		black	4BPP40.V30G	44.70	52.61	39.71
		canvas	4BPP40.V30C	44.70	52.61	39.71
Bticino®	Matix™	white	4B.AM.P40	47.00	49.00	39.91
		red	4B.AM.P40	47.00	49.00	39.91
	MatixGO™	white	4BPP40.JW	44.82	45.15	39.70
		grey	4BPP40.JG	44.82	45.15	39.70
	Livinglight™	white (Light™)	4B.N.P40	44.25	47.00	39.71
		tech (Light Tech™)	4B.NT.P40	44.25	47.00	39.71
		anthracite (Living International™)	4B.L.P40	44.25	47.00	39.71
		red	4B.LR.P40	44.25	47.00	39.71
	Living Now™	black	4BPP40.KG	44.87	44.72	39.70
		sand	4BPP40.KM	44.87	44.72	39.70
		white	4BPP40.KW	44.87	44.72	39.70
Gewiss®	System™	white	4B.G20.P40	46.60	45.60	39.91
		red	4B.G20R.P40	46.60	45.60	39.91

Dimensions in mm

NOTES

Electrical sockets 250 V~


2P+E 16 A electrical sockets for:
- 2P 2.5 A Europlugs
- 2P and 2P+E 10 A and 16 A Italian standard plugs
- 2P+E 16 A 250 V German standard plugs (two modules)
Does not provide earth continuity with the French standard plug

Main features

- Rated voltage: 250 V~
- Rated current: 10 A-16 A
- Shuttered receptacles
- Breaking capacity: 50 cycles (plug insertion and withdrawal)
275 V~ cos ϕ 0.6 (12.5 A and 20 A)
- Electrical life: > 5,000 cycles (plug insertion and withdrawal) with rated current and voltage at cos ϕ 0.8

Compatible with the following residential and commercial wiring accessory systems:

Bticino®, Vimar®, Gewiss®

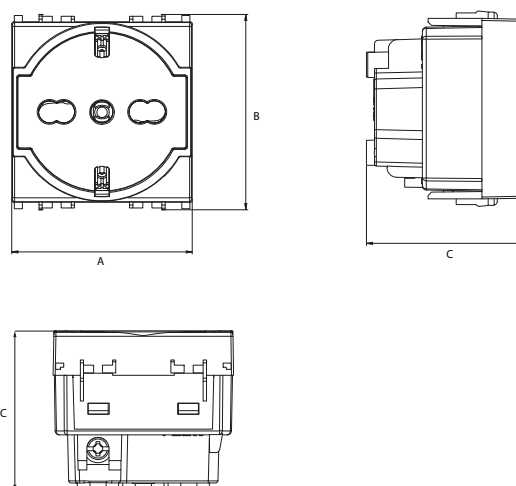

Compatible plugs

Italian standard

German standard

