



4b P503



TECHNICAL SPECIFICATIONS

Electrical sockets 250 V AC

P SERIES

Applications

Electrical outlets for general residential and commercial use.

Conformance

Product manufactured in accordance with
CEI 23-50/2007 + V1/2008 + V2/2011 + V3/2015 + V4/2015

Compatibility, codes and dimensions

Brand	System	Colour	Code	A	B	C
Vimar®	Plana™	white	4BP503.V14	67.20	47.70	38.89
	Arkè™	white	4BP503.V19B	67.20	48.45	39.29
		grey	4BP503.V19	67.20	48.45	39.29
		metal	4BP503.V19M	67.20	48.45	39.29
	Linea™	white	4BP503.V30B	66.95	52.80	39.19
		black	4BP503.V30G	66.95	52.80	39.19
		canvas	4BP503.V30C	66.95	52.80	39.19
Bticino®	Matix™	white	4BP503.AM	70.70	49.00	38.59
	MatixGO™	white	4BP503.JW	67.17	44.77	38.30
		grey	4BP503.JG	67.17	44.77	38.30
	Livinglight™	white (Light™)	4BP503.N	66.00	47.00	38.69
		tech (Ligh Techt™)	4BP503.NT	66.00	47.00	38.69
		anthracite (Living International™)	4BP503.L	66.00	47.00	38.69
	LivingNow™	white	4BP503.KW	67.17	44.77	38.80
		sand	4BP503.KM	67.17	44.77	38.80
		black	4BP503.KG	67.17	44.77	38.80


Dimensions in mm

Main features


- Rated voltage: 250 V~
- Rated current: 10 A-16 A
- Shuttered receptacles
- Breaking capacity: 50 cycles (plug insertion and withdrawal)
275 V~ cos φ 0.6 (12.5 A and 20 A)
- Electrical life: > 5,000 cycles (plug insertion and withdrawal) with
rated current and voltage at cos φ 0.8

Compatible with the following residential and commercial wiring accessory systems:

Bticino®, Vimar®

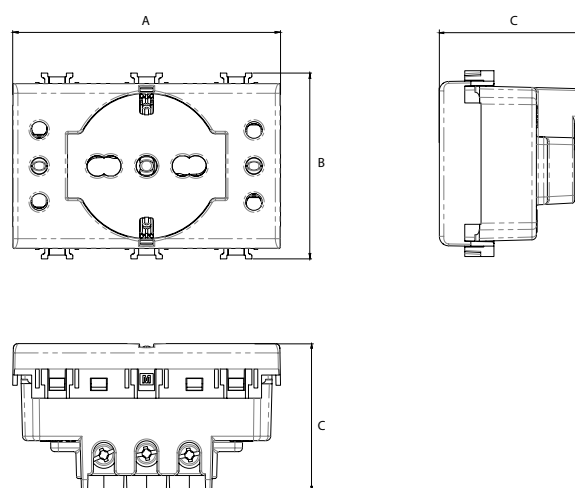

Configuration:

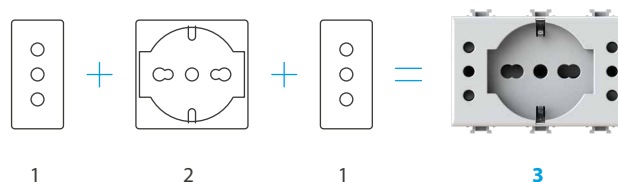

NOTES

Electrical sockets 250 V~

2P+E 16 A electrical sockets for:
- 2P 2.5 A Europlugs
- 2P and 2P+E 10 A and 16 A Italian standard plugs
- 2P+E 16 A 250 V German standard plugs (two modules)
Does not provide earth continuity with the French standard plug

Compatible plugs

Italian standard



2P 10 A




2P+E 10 A



2P+E 16 A

German standard



2P+E