



4b Side



TECHNICAL SPECIFICATIONS

Electrical sockets 250 V AC 16 A

P SERIES

Applications

Electrical outlets for general residential and commercial use.

Conformance

Test reports issued by IMQ in accordance with Standard CEI 23-50 (IEC 60884-1) + V1:2008 + V2:2011 + V3:2015 as far as applicable.

Compatibility, codes and dimensions

Brand	System	Colour	Code	A	B	C
Vimar®	Linea™	white	4BPH21.V30B	44.60	52.70	47.90
		canvas	4BPH21.V30C	44.60	52.70	47.90
		black	4BPH21.V30G	44.60	52.70	47.90
	Plana™	white	4B.V14.H21	44.80	48.46	40.20
		silver	4B.V14SL.H21	44.80	48.46	40.20
		red	4B.V14R.H21	44.80	48.46	40.20
	Arkè™	white	4B.V19B.H21	47.00	49.00	40.20
		grey	4B.V19.H21	47.00	49.00	40.20
		metal	4B.V19M.H21	47.00	49.00	40.20
		red	4B.V19R.H21	47.00	49.00	40.20
	Eikon™	white	4B.V20B.H21	44.80	48.46	40.20
		next	4B.V20N.H21	44.80	48.46	40.20
		red	4B.V20R.H21	44.80	48.46	40.20
Bticino®	MatixGo™	white	4BPH21.JW	44.60	45.00	47.10
		grey	4BPH21.JG	44.60	45.00	47.10
	Matix™	white	4B.AM.H21	44.80	48.47	40.40
		red	4B.AMR.H21	44.80	48.47	40.40
	Livinglight™	white (Light™)	4B.N.H21	43.70	47.00	40.20
		tech (Light Tech™)	4B.NT.H21	43.70	47.00	40.20
		anthracite (Living International™)	4B.L.H21	43.70	47.00	40.20
		red	4B.LR.H21	43.70	47.00	40.20
	Living Now™	sand	4BPH21..KM	44.40	44.60	47.60
		white	4BPH21.KW	44.40	44.60	47.60
		black	4BPH21.KG	44.40	44.60	47.60
Gewiss®	Chorus™	white	4B.G10.H21	44.10	48.20	40.20
		black	4B.G12.H21	44.10	48.20	40.20
		titanium	4B.G14.H21	44.10	48.20	40.20
	System™	white	4B.G20.H21	46.00	45.40	40.20
		red	4B.G20R.H21	46.00	45.40	40.20

Dimensions in mm

NOTES

Electrical sockets 250 V~


2P+E 16 A electrical sockets for:
- 2P 2.5 A Europlugs
- 2P and 2P+E 10 A and 16 A Italian standard plugs
- 2P+E 16 A 250 V German standard plugs (two modules)
Does not provide earth continuity with the French standard plug

Main features


- Rated voltage: 250 V~
- Rated current: 10 A-16 A
- Shuttered receptacles
- Breaking capacity: 50 cycles (plug insertion and withdrawal) 275 V-cos φ 0.6 (12.5 A and 20 A)
- Electrical life: > 5,000 cycles (plug insertion and withdrawal) with rated current and voltage at cos φ 0.8

Compatible with the following residential and commercial wiring accessory systems:

Bticino®, Vimar®, Gewiss®.

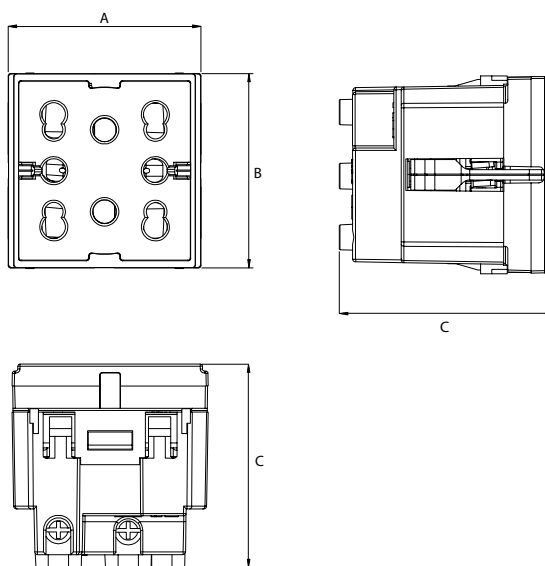

Possible configurations:

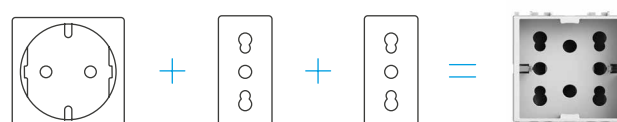

Compatible plugs

Italian standard



2P 10 A



2P+E 10 A



2P+E 16 A

German standard



2P+E