



4b Side | FOR PANELS



TECHNICAL SPECIFICATIONS

Electrical sockets 250 V AC

PSERIES

Applications

Panel-mounted electrical outlets for general residential and commercial use.

Conformance

- Intertek in accordance with CEI 23-50 (IEC 60884-1) + V1:2008 + V2:2011 as applicable
- From Rev 1: IMQ in accordance with CEI 23-50 (IEC 60884-1) + V1:2008 + V2:2011 as applicable

Main features

- Rated voltage: 250 V~
- Rated current: 10 A-16 A
- Shuttered receptacles
- Breaking capacity: 50 cycles (plug insertion and withdrawal) 275 V- cos φ 0.6 (12.5 A and 20 A)
- Electrical life: > 5,000 cycles (plug insertion and withdrawal) with rated current and voltage at cos φ 0.8


Compatibility, codes and dimensions

Compatibility	Colour	Code	A	B	C	D
For panels	anthracite	4B.SPAN	44.80	31.00	52.00	40.20
	white	4B.SPBN	44.80	31.00	52.00	40.20


Dimensions in mm

Mounting

4 mm diameter screw couplings.

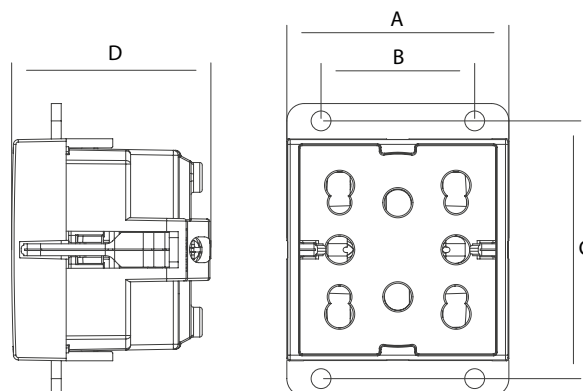

Possible configurations:

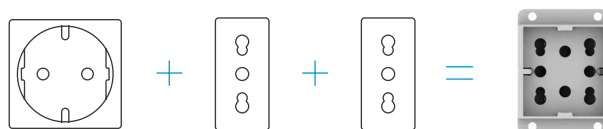

NOTES

Electrical sockets 250 V~

2P+E 16 A electrical sockets for:
- 2P 2.5 A Europlugs
- 2P and 2P+E 10 A and 16 A Italian standard plugs
- 2P+E 16 A 250 V German standard plugs (two modules)
Does not provide earth continuity with the French standard plug

Compatible plugs

Italian standard



2P 10 A



2P+E 10 A



2P+E 16 A

German standard



2P+E