



4b USB P40 CC 25W



TECHNICAL SPECIFICATIONS

Electrical socket 250 V AC + 2 type C USB output 25 W

U SERIES

Electrical socket 250 V~ 16 A
USB power supply 25W - 2 type C output

Applications

Electrical outlets for general residential and commercial use plus 2 USB power supply for use with devices including smartphones, tablets and cameras

Conformance (electrical socket)

CEI 23-50:2007+V1/2008 + V2/2011 + V3/2015 + V4/2015
LV Directive

Conformance (USB power supply)

- Directives: LV Directive, EMC Directive, RoHS Directive, and ErP Directive.
- Standards: EN IEC 62368-1, EN 55032, EN 55035, EN IEC 61000-3-2, EN 61000-3-3, EN 50563, and EN IEC 63000.
- Regulations: External power supplies regulation (EU) n. 2019/1782 and REACH Regulation (EU) n. 1907/2006-art.33.

The product may contain traces of lead.

Main features (electrical socket)

- Rated voltage: 230 V~
- Rated current: 10 A-16 A
- Shuttered receptacles
- Breaking capacity: 50 cycles (plug insertion and withdrawal) 275 V ~ cos ϕ 0.6 (12.5 A and 20 A)
- Electrical life: > 5,000 cycles (plug insertion and withdrawal) with rated current and voltage at cos ϕ 0.8

Main features (USB power supply)

- Power supply: 230 V ~ 50 Hz
- Power Consumption: 250 mA
 - USB tipo C1 o C2: 5.0 V DC 3.0 A; 9.0 V DC, 2.77 A; 12.0 V DC, 2.08 A (PD25W)
- Output power: 25W Max
- No load consumption: <100 mW
- Degree of protection: IP20
- Average efficiency in active mode: 86%
- Efficiency with low load (10%): 81%
- Operating temperature: 0°C/+45°C (indoor)
- Class device II
- Overvoltage category (IEC 60364-4-44) CAT III
- The length of the cable connecting to the electronic device on the USB side must be less than 1mm


Compatibility, codes and dimensions

Brand	System	Colour	Code	A	B	C
Vimar®	Linea™	white	4BUP4025CC.V30B	52.70	52.80	44.70
		black	4BUP4025CC.V30G	52.70	52.80	44.70
		canvas	4BUP4025CC.V30C	52.70	52.80	44.70
Bticino®	MatixGO™	white	4BUP4025CC.JW	45.20	52.80	44.80
		grigio	4BUP4025CC.JG	45.20	52.80	44.80

Dimensions in mm

Compatible with the following residential and commercial wiring accessory systems:

Bticino®, Vimar®.

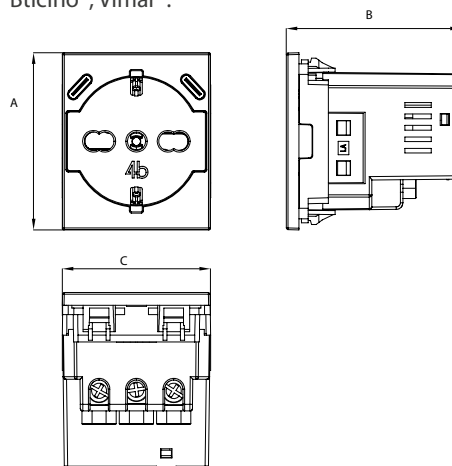

NOTES

Electrical sockets 250 V~

2P+E 16 A electrical sockets for:

- 2P 2.5 A Europlugs.
 - 10 A and 16 A 2P+E plugs, Italian standard.
 - 16 A 250 V 2P+E plugs, German standard (two modules).
- Does not provide earth continuity with the French standard plug.

Compatibility plugs


Italian standard



2P 10 A



2P+E 10 A



2P+E 16 A

German standard



2P+E

USB



USB C