




4b Wide

TECHNICAL SPECIFICATIONS

Wide IP55 enclosure

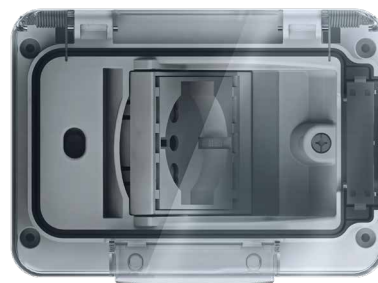

E SERIES

Applications

Applications include: Garages, cellars, balconies, terraces, porches, building perimeters, gardens, public bathrooms, changing rooms, industrial kitchens, and laboratories.

Conformance

EN60529:1997/A2:2014-EM60670-1:2005 + A1:2013



Made in CN


IP55 enclosure for 3-module flush-mounting box

Housing with a hinged opening door with IP55 protection rating even with the plug inserted and the door closed.

Codes and dimensions

Type	Colour	Code	A	B	C	D	E
With module	RAL 7035	4B.W.RAL.015	126.30	90.65	68.20	38.90	29.30
	anthracite	4B.W.03.015	126.30	90.65	68.20	38.90	29.30
	white	4B.W.01.015	126.30	90.65	68.20	38.90	29.30
	forest green	4B.W.04.015	126.30	90.65	68.20	38.90	29.30
Without module	RAL 7035	4B.W.RAL	126.30	90.65	64.78	35.48	29.30
	anthracite	4B.W.03	126.30	90.65	64.78	35.48	29.30
	white	4B.W.01	126.30	90.65	64.78	35.48	29.30

Dimensions in mm

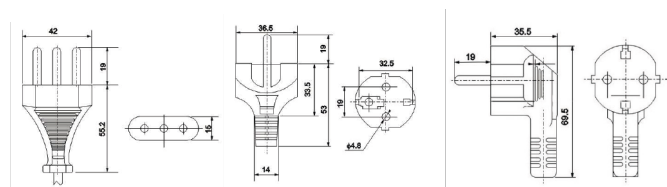

Main features


- Protection rating: IP55
- Two-module tilting support
- The IP55 rating refers to the output of a single cable with a maximum diameter of 10 mm
- Made of flame-retardant ABS/PC/TPE
- 2 screws included

Plug compatibility

- Use of plugs in S10/11 S16/17 standard (maximum plug length 55.2 mm excluding pins, cable diameter 5-10 mm).
- Use of plugs in S30/S31 standard with axial cable (maximum plug length 53 mm excluding pins) or with 90° cable (maximum plug length 69.5 mm).

Compatible with the following residential and commercial wiring accessory systems:

Vimar® Plana™

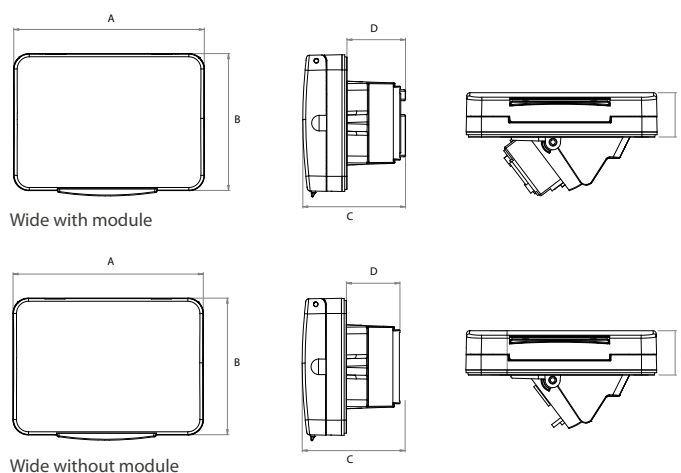

3-module flush-mouted box compatibility

Flush mount boxes for masonry walls				Flush mount boxes for partition walls			
Biticino 503E	Gewiss GW24403	Vimar V71303	Ave 250MG 253x4	Biticino PB503	Gewiss GW24207 GW24403PM	Vimar V71703	Ave 253CG
✓	✓	✓	✓	x	x	x	x